
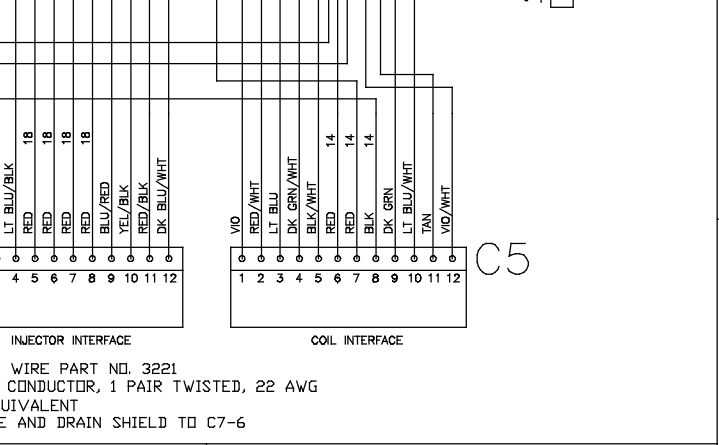
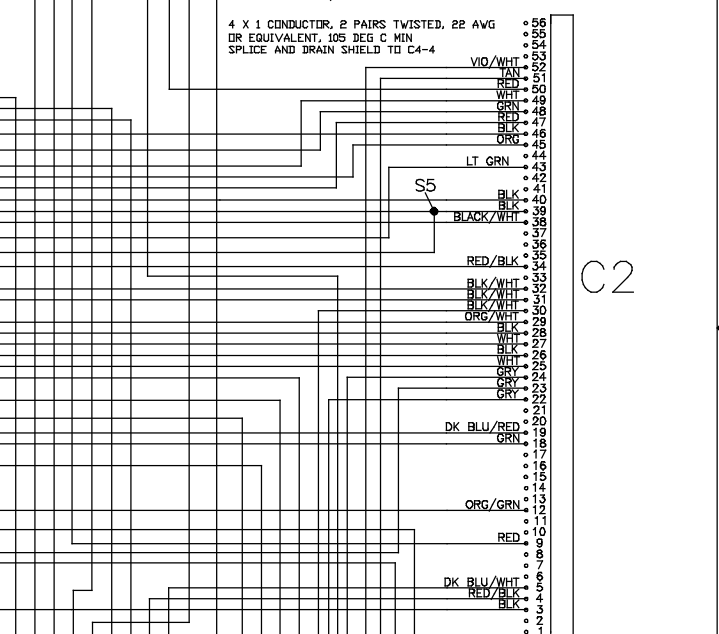
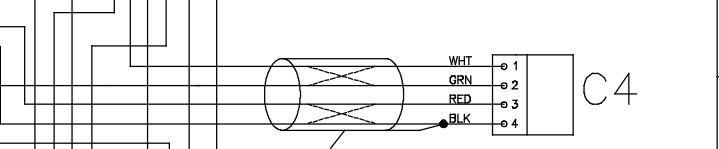
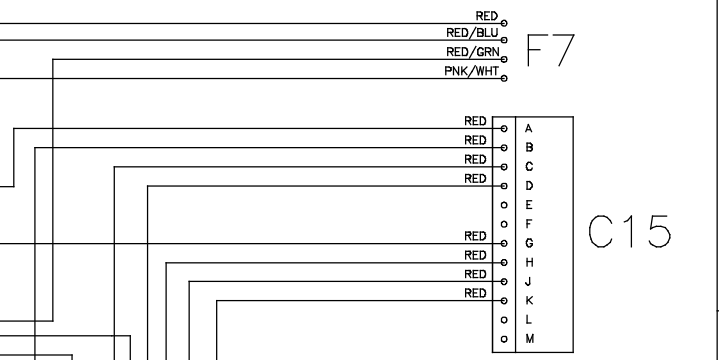


REVISIONS					
ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
B			ADDITIONAL SPLICE SHOWN ADDED FOR WIRE PROTECT	9/18/13	
A			INITIAL RELEASE	10/25/13	
B	38		SENSING SPEED ADDED FOR SHIELDED CABLE - 100 DEG C MIN	12/13/13	

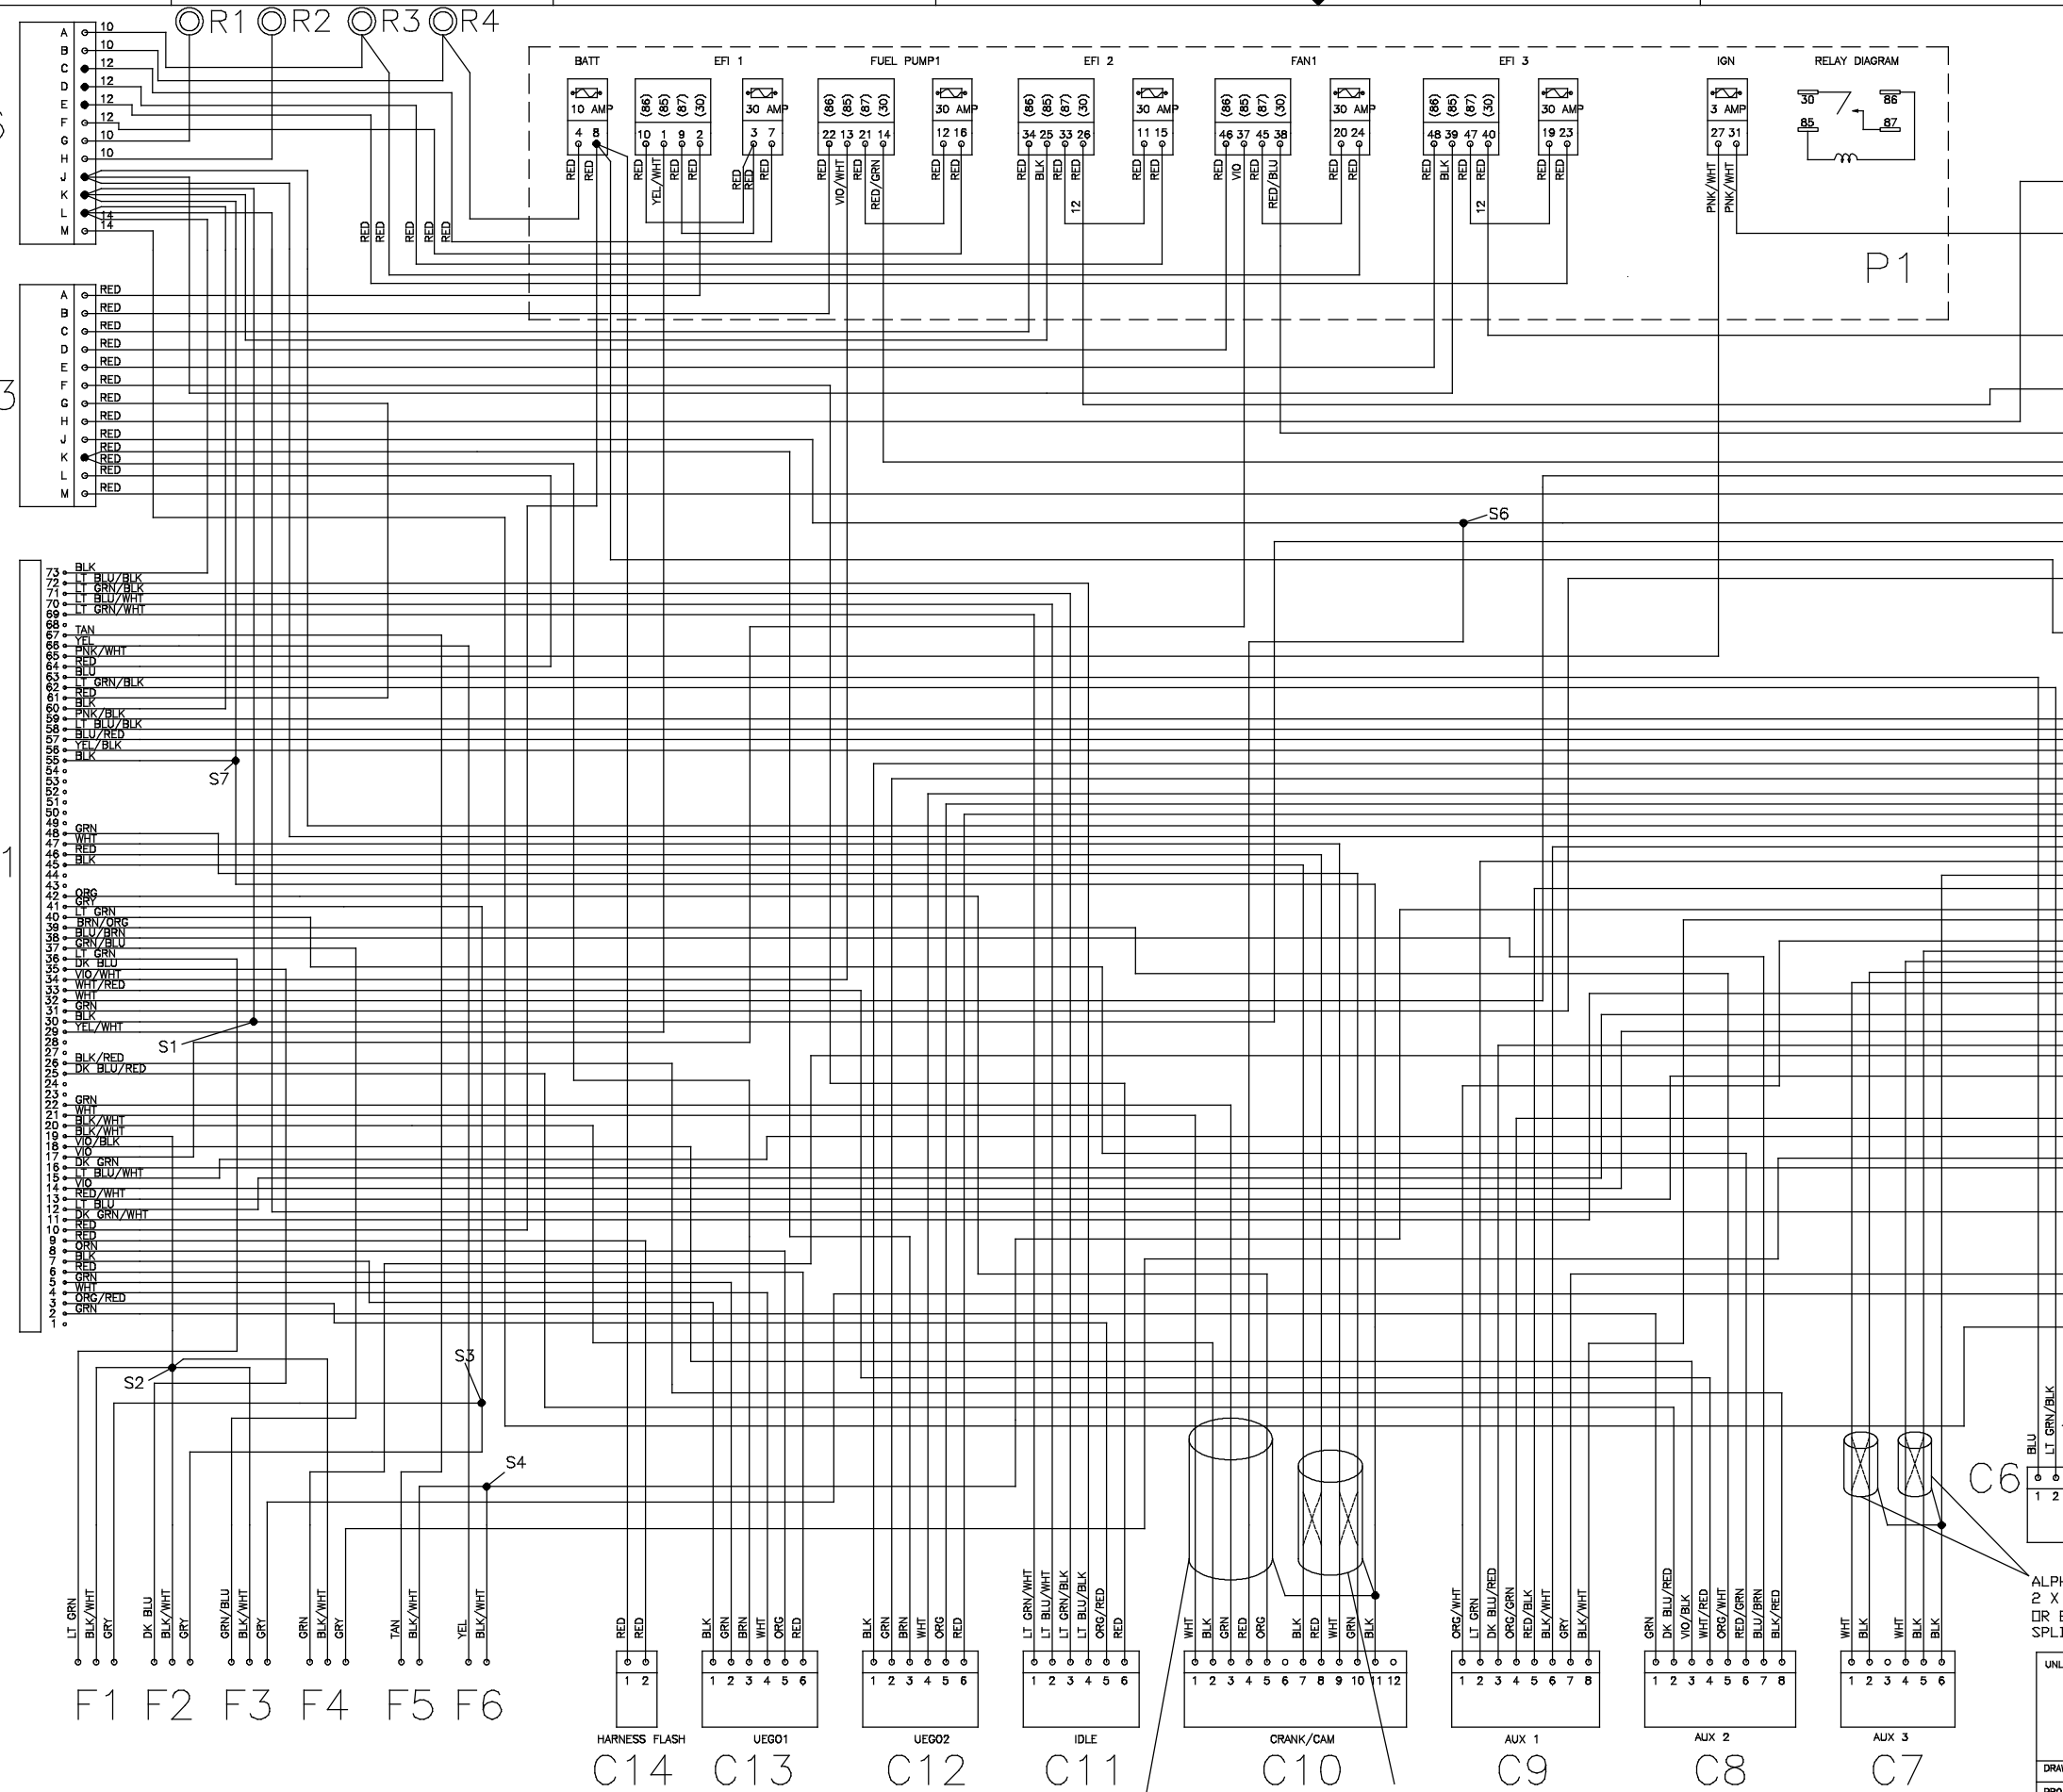

UNLESS OTHERWISE SPECIFIED:

**HARNESS, INFINITY - UNIV. V8**

DRAWN	DATE	PROJECT ENGR.	SA	8/14/13
CHECKED				
STATUS				

SIZE	FSCM NO.	PART NO.	REV
D		36-3805	B

SCALE: SHEET 1 OF 2

5 X 1 CONDUCTOR, 22 AWG OR EQUIVALENT, 105 DEG C MIN SPLICE AND DRAIN SHIELD TO C10-11

NOTE PINS 2 AND 5 FROM CABLE AT C10 MUST BE SPLICED LOCATE SPLICES IN CONVENIENT LOCATION

4 X 1 CONDUCTOR, 2 PAIRS TWISTED, 22 AWG OR EQUIVALENT, 105 DEG C MIN SPLICE AND DRAIN SHIELD TO C10-11